

Ezi-Lay


Floating Floor Underlay with Film Backing

What is Ezi-Lay Floating Floor Underlay?

- **Ezi-Lay** is technically and visually a high quality closed-cell, crosslinked polyolefin foam, with film backing, supplied in roll form.
- It is an Australian made underlay, designed especially for use under timber floors, where strength, cushioning, and water vapour barrier, are required.

How do I lay Ezi-Lay?

1. **Ezi-Lay** Floating Floor Underlay can be laid onto any firm surface, such as, a smooth concrete screed or an already existing wooden floor (renovation), without the use of adhesives. The bare floor surface must be smooth, clean, and dry. Sharp and pointed objects must be removed.
2. Unroll **Ezi-Lay** Underlay and lay with sheet edges butting to each other. Cover all joints with a suitable adhesive tape.
3. Carefully fold **Ezi-Lay** Underlay up wall surrounds and around pipes etc. to prevent bridging.
4. When laying the new floating floor, **Ezi-Lay** Underlay can be walked on. Care should be taken so as to not damage the **Ezi-Lay** Underlay sheet.

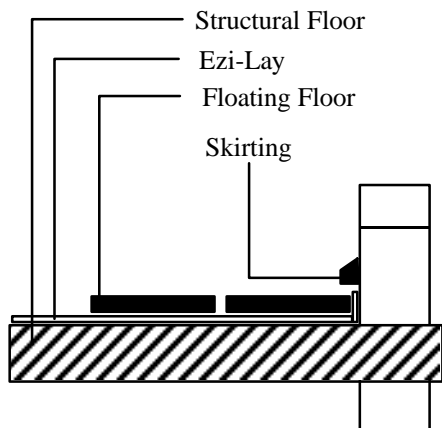

- Film Lap
- Ensures Barrier Continuity



- Great Lay Flat,
- Easy to Lay,
- Australian Made

Ezi-Lay Specifications?

- | | |
|---|-----|
| • Thickness (mm): | 2 |
| • Thickness loss, 3 years, 23C, at 5kPa load (%): | <10 |
| • Water absorption (28 days) (% vol.): | < 1 |
| • Compressive strength at 25% compression (kPa): | 30 |

If you require more information on the subject of this data sheet, please contact your local agent or contact:

Pilon Plastics Pty Ltd
Ph: (02) 9525 9880
Fax: (02) 9525 8004.

